



#### Downlights Data

model	ZX-D3*1
power	3w
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	240LM-270LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ90mm*H45mm ( PortiforiumΦ70mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-D5*1
power	5w
voltage	AC85v-AC265v/AC12V-AC24V/DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	400LM-450LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ102mm*H60mm ( PortiforiumΦ92mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-D7*1
power	7W
voltage	AC85v-AC265v/AC12V-AC24V/DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	560LM-630LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ102mm*H60mm ( PortiforiumΦ92mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-D9*1
power	9W
voltage	AC85v-AC265v/AC12V-AC24V/DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	720LM-810LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ135mm*H68mm ( PortiforiumΦ112mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-D3*3
power	9w
voltage	AC85v-AC265v/ 50Hz/60Hz
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	480LM-510LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ102mm*H60mm ( PortiforiumΦ92mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-D3*3-W
power	3*3w
voltage	AC85v-AC265v 50Hz/60Hz/
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	480LM-510LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ90mm*H70mm ( PortiforiumΦ75mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-D5*3
power	5*3w
voltage	AC85v-AC265v/ 50Hz/60Hz
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	750LM-780LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ102mm*H60mm ( PortiforiumΦ92mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-D12*1
power	12w
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	960LM-1080LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ135mm*H68mm ( PortiforiumΦ112mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-D15*1
power	15w
voltage	AC85v-AC265v/ 50Hz/60Hz
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	1200LM-1350LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ160mm*H100mm ( PortiforiumΦ125mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-D18*1
power	18w
voltage	AC85v-AC265v/ 50Hz/60Hz
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	1440LM-1520LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ160mm*H120mm ( PortiforiumΦ138mm ) )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-DB10*1
power	10w
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	120°
Luminous Flux	800LM-900LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ130mm*H68mm ( PortiforiumΦ105mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-DB12*1
power	12w
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	120°
Luminous Flux	960LM-1080LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ130mm*H68mm ( PortiforiumΦ105mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-DB15*1
power	15w
voltage	AC85v-AC265v/ 50Hz/60Hz
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	120°
Luminous Flux	1200LM-1350LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ190mm*H80mm ( PortiforiumΦ160mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-DB1*20
power	20w
voltage	AC85v-AC265v/ 50Hz/60Hz
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	120°
Luminous Flux	1600LM-1800LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ190mm*H80mm ( PortiforiumΦ160mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-DA3*1
power	3W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	180°
Luminous Flux	210LM-240LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ118mm*H55mm ( PortiforiumΦ82mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-DA5*1
power	5W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	180°
Luminous Flux	400LM-450LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ120mm*H91mm ( PortiforiumΦ90mm ) )
life	50000H
certification	CE,RoHS
Warranty	2years





model : ZX-DA7\*1

**Downlights Data**

model	ZX-DA7*1
power	7W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	180°
Luminous Flux	490LM-560LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ120mm*H91mm ( PortiforiumΦ90mm )
life	50000H
certification	CE,RoHS
Warranty	2years



**Downlights Data**

model	ZX-DA9*1
power	9w
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	180°
Luminous Flux	630LM-720LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ150mm*H78mm ( PortiforiumΦ108mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-DA1*10
power	10W
voltage	AC85v-AC265v/ 50Hz/60Hz
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	180°
Luminous Flux	700LM-800LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ120mm*H91mm ( PortiforiumΦ90mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-DA12*1
power	12w
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	180°
Luminous Flux	870LM-960LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ150mm*H78mm ( PortiforiumΦ108mm )
life	50000H
certification	CE,RoHS
Warranty	2years



#### Downlights Data

model	ZX-DA15*1
power	15W
voltage	AC85v-AC265v/ 50Hz/60Hz
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	180°
Luminous Flux	1150LM-1200LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ120mm*H91mm ( PortiforiumΦ90mm )
life	50000H
certification	CE,RoHS
Warranty	2years



model : ZX-DD4\*1

#### Downlights Data

model	ZX-DD4*1
power	4W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°
Luminous Flux	280LM-320LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ90mm*H48mm ( PortiforiumΦ77mm )
life	50000H
certification	CE,RoHS
Warranty	2years



model : ZX-DD5\*1

**Downlights Data**

model	ZX-DD5*1
power	5W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°
Luminous Flux	350LM-400LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ108mm*H50mm ( PortiforiumΦ88mm )
life	50000H
certification	CE,RoHS
Warranty	2years



model : ZX-DD7\*1

**Downlights Data**

model	ZX-DD7*1
power	7W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°
Luminous Flux	490LM-560LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	Φ108mm*H50mm ( PortiforiumΦ88mm )
life	50000H
certification	CE,RoHS
Warranty	2years



model

**Downlights Data**


model	ZX-D-SA3*1
power	3W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	240LM-270LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	L92mm*W92mm*H47mm ( Portiforium : L72mm*L72mm )
life	50000H
certification	CE,RoHS
Warranty	2years



model : ZX-D-SA3\*1-B

**Downlights Data**

model	ZX-D-SA3*1-B
power	3W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	240LM-270LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	Black
Material	Aluminum
Size	L92mm*W92mm*H47mm ( Portiforium : L72mm*L72mm )
life	50000H
certification	CE,RoHS
Warranty	2years

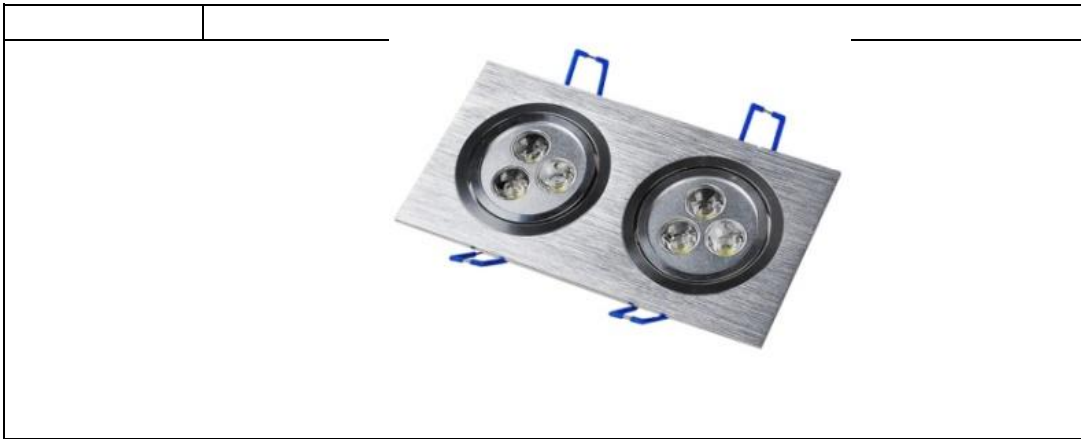

model : ZX-D-SB2\*3\*1

Downlights Data	
model	ZX-D-SB2*3*1
power	6W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	400LM-450LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	L169mm*W91mm*H46mm ( Portiforium : L152mm*W72mm )
life	50000H
certification	CE,RoHS
Warranty	2years



model : ZX-D-SB2\*3\*1-B

Downlights Data	
model	ZX-D-SB2*3*1-B
power	6W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	480LM-540LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	Black
Material	Aluminum
Size	L174mm*W91mm*H42mm ( Portiforium : L152mm*W72mm )
life	50000H
certification	CE,RoHS
Warranty	2years



model : ZX-D-SB2\*5\*1

**Downlights Data**

model	ZX-D-SB2*5*1
power	10W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	800LM-900LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	L250mm*W105mm*H67mm
life	50000H
certification	CE,RoHS
Warranty	2years



model : ZX-D-SB3\*3\*1

**Downlights Data**

model	ZX-D-SB3*3*1
power	9W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	720LM-810LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	L250mm*W92mm*H46mm ( Portiforium : L230mm*W71mm )
life	50000H
certification	CE,RoHS
Warranty	2years



model : ZX-D-SB4\*3\*1

Downlights Data	
model	ZX-D-SB4*3*1
power	12W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	960LM-1080LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	L333mm*W92mm*H46mm ( Portiforium : L315mm*W71mm )
life	50000H
certification	CE,RoHS
Warranty	2years



model : ZX-D-SA4\*3\*1

Downlights Data	
model	ZX-D-SA4*3*1
power	12W
voltage	AC85v-AC265v50Hz/60Hz/ AC12V-AC24V/ DC12V-DC24V
Color temperature	2800K-3200K(warm white ) /5500K-6000K(pure white )
Beam Angle	30°/45°/60°/120°
Luminous Flux	960LM-1080LM
Ra	75(pure white ) /65 ( warm white )
PF	0.85
shell color	silver
Material	Aluminum
Size	L175mm*W175mm*H47mm ( Portiforium : L154mm*W154mm )
life	50000H
certification	CE,RoHS
Warranty	2years